


0003 POLY VA

VINYL FIXATIVE-BONDING FOR WALLS

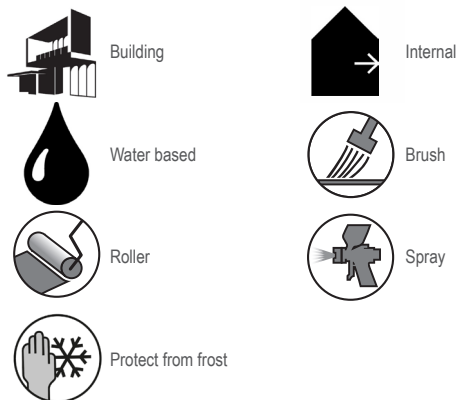

Advantages

- High yield
- Primer suitable for encapsulation cycles

Description and Use

POLY VA is a fixative-insulating agent for interior use, vinyl-based, offering high resistance to alkali, suggested to avoid the absorbing differences on the plasterworks, and to ensure a perfect paint adhesion.

POLY VA can be used as a TYPE D coating to encapsulate cement-asbestos surfaces, in order to prevent fibers dispersion during removal or disposal works (as provided for by Ministerial Decree dated 20 August 1999 reported in the 22/10/1999 issue of the Official Gazette).

Substrate preparation

- On old or chalking surfaces brush and scrape taking off the flaking parts, fill up with putty and then apply the bonding POLY VA.

TYPE D coating:

- Using POLY VA as a TYPE D coating to be applied on cement-asbestos surfaces, the fixative has to be stained with 1 - 2% of PASTA ROSSO OSSIDO code 09207330 in order to ensure, once applied, a layer of colour contrasting with the substrate.
- POLY VA so coloured must be thinned 1:3 with water and directly applied avoiding the cleaning of the surface.

Application

Application method:

- brush
- roller
- spray

When POLY VA is used as a TYPE D coating, only spray application is permitted.

Dilution:

- used as fixative-bonding: 1 part of POLY VA + 7 parts of water
- used as TYPE D coating: 1 part of POLY VA + 3 parts of water

