


0011 GREY FIX

PIGMENTED WATER-REDUCIBLE FIXATIVE

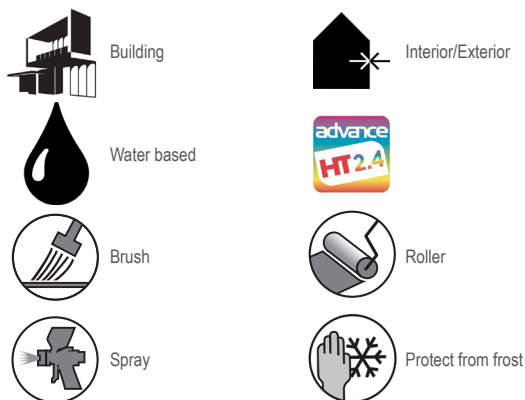

Description and Use

GREY FIX is a wall primer with high penetration and high covering properties, suitable for preparing the substrate prior to painting both indoors and outdoors.

Particularly suitable as an undercoat for water-based paints with intense colours to improve final coverage, it can be coloured using the ADVANCE HT tinting system.

Can be applied to new or already painted surfaces, civil plaster but also prefabricated panels, thermal composite systems, gypsum and plasterboard; improves the absorbency of surfaces, even particularly crumbling surfaces, ensuring homogeneous and lasting results.

Substrate preparation

- The underlying surface must be seasoned, noncrumbling and clean, no grease, oil or other polluting agents.

Remove any efflorescence and non-adhering old paints.

In case of mould or algae growth, carry out a treatment with DECISO code 0610, wash the wall.

On plaster, level any unevenness with a suitable levelling compound, and allow the treated areas to rest; fill and rub down holes, cracks and crackles with IMPASTUK UNIVERSAL EXTRA code 0401.

Once the substrate is dried, apply GREY FIX properly diluted.

Application

Application method:

- brush
- roller
- spray

Product preparation:

Mix to achieve even colour and consistency.

Dilution:

20-25% water, by weight

30-35% water, by volume

Storage life

PROTECT FROM FROST. Store the packaged product at a temperature between +5°C and +35°C.

If stored in a cool, dry place, away from sources of heat and sheltered from sunlight, in its sealed original packaging, the product has a shelf life of 24 months. Check the product's shelf life by referring to the production batch number shown on the packaging. The batch number is made of eight numeric characters in which the first four digits identify the year and month of production. Once the product has expired, it must be disposed of in accordance with the current legislation.

Technical features

Colour	white
Appearance of the dry film	matt
Specific weight	1.47 kg/l (\pm 0.02)
Viscosity	10000-14000 mPa.s Brookfield
Practical cover rate	10-12 m ² /l depending on surface absorption
Recoatible	after 4-6 hours
EU limit value of VOC content (Directive 2004/42/EC)	Category A/h, WB: VOC maximum 30 g/l product VOC < 30 g/l
The data are measured at a temperature of 20°C.	

Warnings

- Product recommended for expert users.
- Read the safety datasheet before use.
- Surface and ambient temperature must be above + 5 (41°F) and below 35°C (95°F).
- During use, ventilate the room well and use water to clean tools.
- The recipient/product must be disposed of in accordance with national laws.
- The information provided on this technical datasheet is based on our technical and practical knowledge and experience. The technical data refer to the average characteristics of the basic product and are determined under controlled laboratory conditions. The variability of the natural raw materials available on the market and the tinting of the product can lead to slight deviations in the declared values, in the colour and in the aesthetic effects obtained. It is therefore necessary for the purchaser/user to personally verify, before application, the suitability of the product for the intended use, in particular when different lots of the same material are used in the same job/site.

NOTE: Do not apply in foggy or rainy weather, or when the relative humidity exceeds 75%.

The above mentioned data are meant to facilitate our customers in the use of our products. IMPA is not responsible for applications of products carried out beyond its direct control. For further technical information about specific systems and/or special applications, please contact our TECHNICAL SERVICE at assistenza.technica@impa.it.