


0211 SANATHERM

WALL PAINT FOR INTERIOR USE WITH GLASS
MICROSPHERES AND FILM PROTECTED AGAINST
THE GROWTH OF A WIDE RANGE OF MOULD

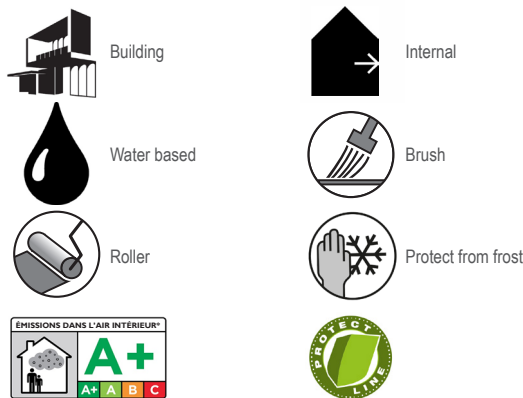

Advantages

- Super comfort
- Limit condensation

Description and Use

SANATHERM is a matt paint for interior use containing hollow glass microspheres that help to reduce the phenomena of surface condensation of the substrate on which it is applied, thus improving living comfort.

Furthermore, special additives make the film more protected from the growth of a wide range of mould.

It is the ideal product for interior walls such as kitchens, bathrooms, canteens, basement and underground rooms etc.; it can be applied on any type of suitably treated substrate, plasters, gypsum and plasterboard.

Substrate preparation

The substrate must be cured, not chalking and clean (without grease, oil or other polluting agents).

For degraded surfaces, remove all traces of old peeling paint and any efflorescence.

In case of mould or algae growth, carry out a treatment with DECISO code 0610.

On plaster, level any unevenness with a suitable levelling compound, and allow the treated areas to rest; fill and rub down holes, cracks and crackles with IMPASTUK UNIVERSAL EXTRA code 0401.

On new, powdery or highly absorbing plaster, on fillings or old flaking paints, apply one layer of masonry fixative to make uniform the substrate absorption. Our suitable products are POLY ACRYL code 0004, otherwise SUPERFIX code 0010 or GREY FIX code 0011, properly diluted.

Once dried, continue applying two or more coats of SANATHERM.

Application

Application method:

- brush
- roller

Product preparation:

Mix to achieve even colour and consistency.

Dilution:

brush: 15-25% water
roller: 10-15% water

Recoating:

wait 6-8 hours between the two coats.

