


## 0218 INTENSA

TRANSPIRING WALL PAINT FOR INTERIOR USE, HIGH HIDING POWER ALSO ON PLASTERBOARDS

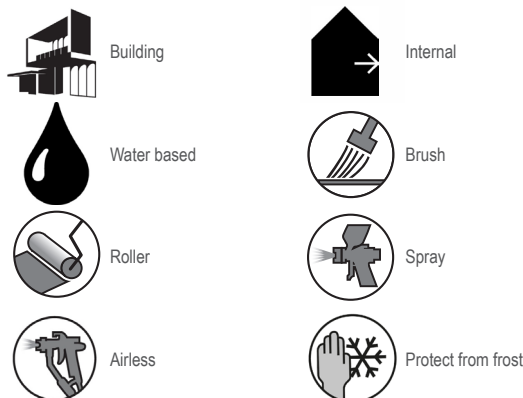

### Advantages

- High covering properties
- For large surfaces

### Description and Use

INTENSA is a breathable water-based paint based on vinyl copolymers, pleasant opaque appearance, characterized by high hiding power, good expansion and good white balance.

It allows to obtain excellent results, especially on large surfaces; it is indicated for application on properly treated gypsum plasterboard, and for all internal surfaces which require a good breathability as in kitchens, bathrooms, etc..

It can be applied on lime-based plasters, mortar of cement and cement products in general.

### Substrate preparation

The substrate must be cured, not chalking and clean (without grease, oil or other polluting agents).

For degraded surfaces, remove all traces of old peeling paint and any efflorescence.

In case of mould or algae growth, carry out a treatment with DECISO code 0610.

On plaster, level any unevenness with a suitable levelling compound, and allow the treated areas to rest; fill and rub down holes, cracks and crackles with IMPASTUK UNIVERSAL EXTRA code 0401.

On new, powdery or highly absorbing plaster, on fillings or old flaking paints, apply one layer of masonry fixative to make uniform the substrate absorption. Our suitable products are POLY ACRYL code 0004, otherwise SUPERFIX code 0010 or GREY FIX code 0011, properly diluted.

Once dried, continue applying two coats of INTENSA.

### Application

#### Application method:

- brush
- roller
- spray
- airless

#### Product preparation:

Mix to achieve even colour and consistency.

#### Dilution:

by weight : 30-35 % of water for the first coat, 25-30% for the second coat.

by volume: 45-50% water for the first coat, 35-45 for the second one.

