


INDURENTI A BASE ISOCIANICA

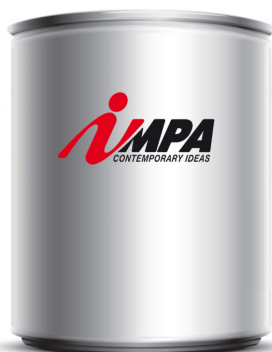

Description and Use

Isocyanate-based hardeners suitable for curing two-component products consisting of acrylic and polyurethane resins. Products indicated for high performance systems. The specific hardener must be used according to the instructions in the technical data sheets of the products to be applied.

Application

Application method:

- Strictly follow the mixing, application and preparation instructions detailed in the technical data sheet of the product (2K PU/ACR) to be applied.

Storage life

If stored in a cool, dry place, away from sources of heat and sheltered from sunlight, in its sealed original packaging, the product has a shelf life in months specified in the table of products with expiry date. Check the product's shelf life by referring to the production batch number shown on the packaging. The batch number is made of eight numeric characters in which the first four digits identify the year and month of production. Once the product has expired, it must be disposed of in accordance with current legislation.

Table of products with expiry date

Product name	Code	isocyanate	Expiry date in months
INDURITORE PER ACRILICI/PU ININGIALLENTE	1873	aliphatic	18
INDURITORE PER ACRILICI/PU ININGIALLENTE RAPIDO	1882	aliphatic	18
INDURITORE PER PU BASIC	1919*	aliphatic	18
INDURITORE 4100 SLOW HS	4100	aliphatic	18
INDURITORE 4105 SLOW	4105	aliphatic	18
INDURITORE 4300 STANDARD HS	4300	aliphatic	18
INDURITORE 4305 STANDARD HS	4305	aliphatic	18
INDURITORE 4376 STANDARD UHS	4376	aliphatic	18
INDURITORE 4386 SLOW UHS	4386	aliphatic	18
INDURITORE 4500 FAST HS	4500	aliphatic	18
INDURITORE 4505 FAST	4505	aliphatic	18
INDURITORE PER SPEED PRIMER-GP 1000	4537	aromatic	18
INDURITORE PER SEALING CAR 2K	4902*	aromatic	12
INDURITORE PER ACRILICI/PU ININGIALLENTE PR	4930	aliphatic	24
* Restricted product according to Regulation (EU) 2020/1149 amending Annex XVII of Regulation (EC) No. 1907/2006 (REACH).			

Warnings

- For professional use only.
- Always refer to the safety data sheet for the relevant products.
- Solvents or thinners used for cleaning tools, as well as any product residues, must not be released into the environment or poured down domestic drains. The recipient/product/thinner or cleaning solvent must be disposed of in accordance with national regulations.
- Do not apply at temperatures below +10°C.
- It is recommended to acquire all the material required to finish the work of the same batch.
- Carefully close the hardener container immediately after use as the product reacts with humidity in the air, compromising the drying properties.
- The information provided on this technical datasheet is based on our technical and practical knowledge and experience. The technical data refer to the average characteristics of the basic product and are determined under controlled laboratory conditions. The variability of the raw materials available on the market and the tinting of the product can lead to slight deviations in the declared values, in the colour and in the aesthetic effects obtained. It is therefore necessary for the purchaser/user to personally verify, before application, the suitability of the product for the intended use, in particular when different batch numbers of the same material are used in the same work/site.

The above mentioned data are meant to facilitate our customers in the use of our products. IMPA is not responsible for applications of products carried out beyond its direct control. For further technical information about specific systems and/or special applications, please contact our TECHNICAL SERVICE at assistenza.technica@impa.it.