


0210 MARMORITE

TRANSPIRING WATER-REPELLENT WALL PAINT FOR INTERIOR USE

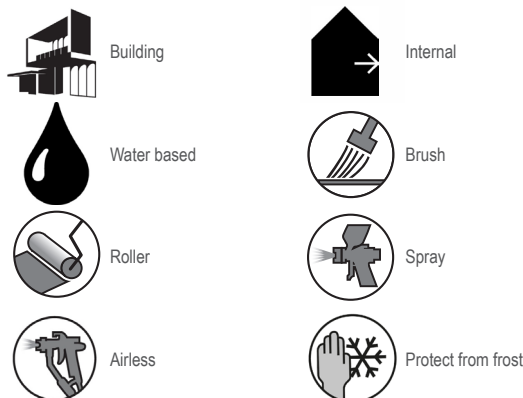

Advantages

- Easy to apply
- High covering properties

Description and Use

MARMORITE is a decorative emulsion paint which allows free exchange of moisture between the room and the wall. It's main features are: easy applicability, high filling and covering properties.

It is suitable wherever there is a need for good transpiring properties of interior plasters, combined with a classy finish; also in outdoor sheltered applications, and wherever moderate weather and environmental conditions will allow.

The product can be coloured using ADVANCE HT tinting system.

Substrate preparation

The underlying surface must be seasoned, non-chalking and clean, no grease, oil or other polluting agents.

For degraded surfaces, remove all traces of old peeling paint and any efflorescence.

In case of mould or algae growth, carry out a treatment with DECISO code 0610.

On plaster, level any unevenness with a suitable levelling compound, and allow the treated areas to rest; fill and rub down holes, cracks and crackles with IMPASTUK UNIVERSAL EXTRA code 0401.

On new, powdery or highly absorbing plaster, on fillings or old flaking paints, apply one layer of masonry fixative to make uniform the substrate absorption.

Indoors, use the water-reducible products POLY ACRYL code 0004, or SUPERFIX code 0010 or GREY FIX code 0011, properly reduced.

Once dried, continue applying two coats of MARMORITE.

Application

Application method:

- brush
- roller
- spray
- airless

Product preparation:

Mix to achieve even colour and consistency.

Dilution:

by weight: 25-30% water for the first coat, 20-25% for the second one.

by volume: 40-50% for the first coat, 35-40% for the second one.

Recoating:

wait 5-6 hours between the two coats.

Storage life

PROTECT FROM FROST. Store the packaged product at a temperature between +5°C and +35°C.

If stored in a cool, dry place, away from sources of heat and sheltered from sunlight, in its sealed original packaging, the product has a shelf life of 24 months. Check the product's shelf life by referring to the production batch number shown on the packaging. The batch number is made of eight numeric characters in which the first four digits identify the year and month of production. Once the product has expired, it must be disposed of in accordance with the current legislation.

Technical features

Colour	white
Binder	vinyl dispersion
Appearance of the dry film	matt (UNI 10795)
Specific weight	1.67 kg/l (± 0.02)
Viscosity	20000-24000 mPa.s Brookfield
Practical cover rate *	5-6 m ² /l per two coats
EU limit value of VOC content (Directive 2004/42/EC)	Cat. A/a, WB: Max VOC 30 g/l product VOC < 30 g/l
* The yield may vary according to the roughness and absorption of the substrate and in relation to the application system used.	
The data are measured at a temperature of 20°C.	

Classification EN 13300	
Wet-scrub resistance	Class 4 (ISO 11998)
Hiding power	Class 1 at a spreading rate of 5 m ² /l (EN ISO 6504-3)
Specular gloss	< 10 GU a 85°, matt (EN ISO 2813)

Warnings

- Product recommended for expert users.
- Read the safety datasheet before use.
- Surface and ambient temperature must be above + 5 (41°F) and below 35°C (95°F).
- During use, ventilate the room well and use water to clean tools.
- The recipient/product must be disposed of in accordance with national laws.
- The information provided on this technical datasheet is based on our technical and practical knowledge and experience. The technical data refer to the average characteristics of the basic product and are determined under controlled laboratory conditions. The variability of the natural raw materials available on the market and the tinting of the product can lead to slight deviations in the declared values, in the colour and in the aesthetic effects obtained. It is therefore necessary for the purchaser/user to personally verify, before application, the suitability of the product for the intended use, in particular when different lots of the same material are used in the same job/site.

Do not apply in foggy or rainy weather, or when the relative humidity exceeds 75%.

The above mentioned data are meant to facilitate our customers in the use of our products. IMPA is not responsible for applications of products carried out beyond its direct control. For further technical information about specific systems and/or special applications, please contact our TECHNICAL SERVICE at assistenza.technica@impa.it.